
# hanla@raycontrol.com | +65 88103634 | +65 88491139

# Flat Type Glass Level Gauge

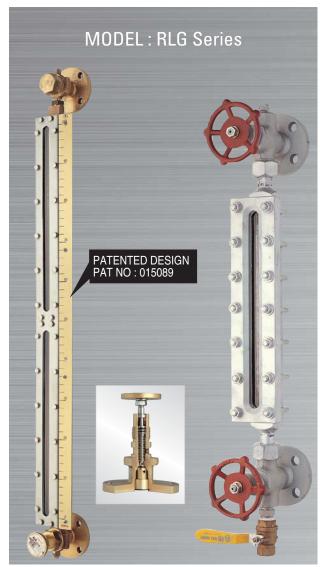

· RLG-LP Series

· RLG-HP Series

#### HANI A MARINE GALIGE

Flat type glass level gauges have been developed to comply with the requirements of the SOLAS 1981, 1983, 1996, 1997, 1998 amendments. The gauges have been reviewed and a suitable construction is accepted by marine classification authorities throughout the world.

#### **FLAT GLASS DESIGN**

The toughened borosilicate glass window is housed and protected in a robust stainless steel column. The exellent level indication even of colourless liquids is provided by reflex glass viewing windows.

# **APPLICATION**

Flat type glass level gauges are used for water tanks, all oil tanks and bolier drum etc.

#### **EASY MAINTENANCE FOR RLG-LP SERIES**

When required, the liquid chambers can be cleaned with the gauge on the tank, alternatively the isolating valves will be able to remove the column without drain of the tank.

## **MODEL NUMBER CODE SYSTEM**

· Symbol of Flat Type

Glass Level Gauge

Type of Level Gauge

IP : Flat Type Used for Low Press. & Temp.

HP : Armored Type Reflex Level Gauge Used for High Press. & Temp.

· Type of Valve —

- · Option

N: Tank Welding Flange With Check Valve(applied to the RLG-series)

W: Wide Measuring (applied to the RLG-LP-14)

T: Manual Operating Device: With Scale board

: With Scale board SR:Right at Your Sight SL:Left at Your Sight

APPLICATION	MODEL	VALVE TYPE					
AFFLICATION	MODEL	Upper	Lower				
	11	Self-closing	Self-closing				
LP	13	Tank return	Self-closing				
	14	Top vent	Self-closing				
	22	Screw-down valve	Screw-down valve with checkball				
HP	C22	Chain valve	Chain valve with check ball				
	CK22	Cock valve	Cock valve				

## Standard model and specification

Model -	Valve type		Connection	Range of	Range of	Material				Center
	Upper	Lower	size	pressure		Valve	Front channel	Back channel	Glass	to Center
RLG-LP-11	Self-closing	Self-closing	JIS 5K20A, 25A	3kg/cm²	150°C	BC6	SUS304	SUS304	Borosilicate	285
RLG-LP-13	Tank return	Self-closing	JIS 5K20A, 25A	3kg/cm²	150°C	BC6	SUS304	SUS304	Borosilicate	~ 5100
RLG-LP-14	Top vent	Self-closing	JIS 5K20A, 25A	3kg/cm²	150°C	BC6	SUS304	SUS304	Borosilicate	(m/m)
RLG-HP-22	Screw-down valve	Screw-down valve WITH CHECK BALL	JIS 16K20A	50kg/cm²	300°C	C,S	C,S	C,S	Borosilicate	320
RLG-HP-C22	Chain valve	Chain valve WITH CHECK BALL	JIS 16K20A	30 kg/cm²	300°C	C,S	C,S	C,S	Borosilicate	~ 2870
RLG-HP-CK22	Cock vlave	Cock vlave	JIS 16K20A	20kg/cm²	300°C	C,S	C,S	C,S	Borosilicate	(m/m)

<sup>■</sup> The level gauges shall be classified into three types 11, 13, 14 according to the shape of the upper body.

<sup>■</sup> Please consult with our factory when other conditions are required.